



SOLARIS HOOK, TILE ROOF MOUNT SOLUTION

Solaris HOOK offers a durable and efficient solution for solar panel installation, reducing project time for professionals. Made from aluminum and stainless steel, it ensures long-lasting performance. Its versatile design accommodates most residential tile roof configurations, with brackets that adapt to various pitches and tile types, seamlessly integrating solar power into residential rooftops.

TECHNICAL PARAMETER

Application	Tile Roof
Material	AL 6005-T5/SUS304
Surface Treatment	Average Anodizing Coating Thickness 10µm
Panel Type	Framed & Frameless
Wind Load	≤45m/s
Snow Load	1.5KN/m²
Panel Orientation	Landscape/Portrait
Tilt Angle	0°~45°
Seismic Load	Lateral Seismic Factor: Kp=1; Seismic Coefficient: Z=1; Use Coefficient: I=1
Standards	JIS C 8955 : 2017; AS/NZS 1170; DIN1055; ASCE/SEI 7-05; International Building Code: IBC 2009
Warranty	10 Years Quality Warranty, 25 Years Life Span Warranty


















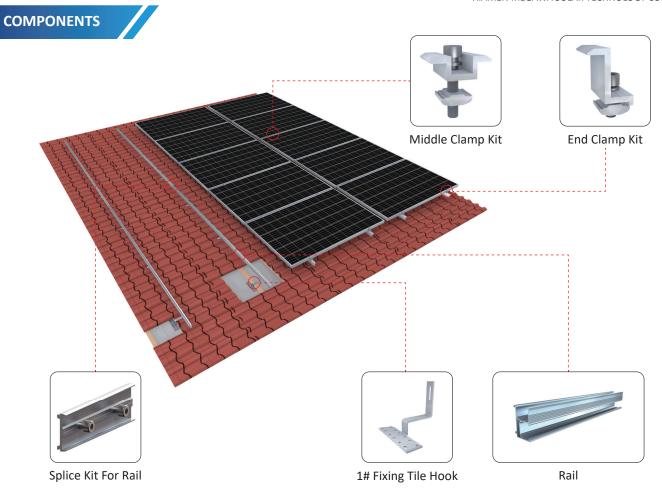

INSTALLATION STEPS

